

Product Specification (L-5.5CUHWS)

Canare Electric Co., Ltd

1. **Scope** This product specification covers the performance of the 75Ω Coaxial cable.
2. **General Specifications**
 - (1) **Product Name** 75Ω Coaxial Cable
 - (2) **Model Name** L-5.5CUHWS
 - (3) **Construction and Appearance** As shown in Fig.1 and Table 1

Fig. 1

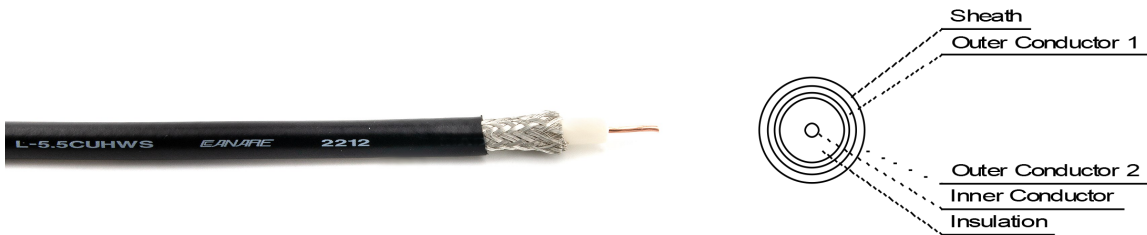


Table 1

Item	Standard Value	Note
No. of Conductor	1	
Inner Conductor	Construction (qty/mm)	7/Compact strand
	Nom. Cross Section Area (mm ²)	1.30
	Outer Diameter (mm)	1.30
Insulation	Thickness (mm)	2.13
	Outer Diameter (mm)	5.56
Outer Conductor 1	Construction (carr/end/mm)	24/10/0.10TA
	Pitch (mm)	<= 42
	Outer Diameter (mm)	6.0
Outer Conductor 2	Construction (carr/end/mm)	24/10/0.10TA
	Pitch (mm)	<= 38
	Outer Diameter (mm)	6.5
Sheath	Thickness (mm)	0.8
	Color	BLK, BRN, RED, ORN, YEL, GRN, BLU, PPL, GRY, WHT Custom colors available
	Marking	12G-SDI 75Ω Coaxial Cable L-5.5CUHWS CANARE <Year Code> MADE IN JAPAN
Outer Diameter (mm)	8.1	

(4) **Weight** Approx. 8.6kg / 100m

(5) **Package** 100m, 200m: Coil
Over 290m: Wooden reel

2. Rating, Standard

- (1) **Rated Voltage** AC 60Vrms
(2) **Temperature Range** -30°C ~ +60°C

3. Electrical Characteristics

Item		Standard Value	Test Method
D.C. Resistance	Inner Conductor	$\leq 14.0\Omega/\text{km}$ (20°C)	JIS C 3005
	Outer Conductor	$\leq 5.8\Omega/\text{km}$ (20°C)	JIS C 3005
Insulation Resistance		$\geq 1000\text{M}\Omega\text{-km}$	JIS C 3005
Voltage Proof		AC1000V 1minute Not Breakdown	JIS C 3005
Characteristic Impedance		$75\pm 3\Omega$ (10MHz)	JIS C 3502
Nominal Capacitance		54nF/km (1kHz)	JIS C 3005
Nominal Attenuation		10MHz: 1.7dB/100m 30MHz: 3.1dB/100m 72MHz: 4.8dB/100m 88MHz: 5.3dB/100m 135MHz: 6.7dB/100m 180MHz: 7.7dB/100m 270MHz: 9.6dB/100m 750MHz: 16.7dB/100m 1.3GHz: 22.7dB/100m 1.5GHz: 24.6dB/100m 2.0GHz: 29.0dB/100m 2.5GHz: 33.0dB/100m 3.0GHz: 36.7dB/100m 6.0GHz: 56.0dB/100m	JIS C 3502

4. Mechanical Characteristics

Item		Standard Value	Test Method
Tensile properties of Sheath	Tensile strength	≥ 14.0 MPa	JIS C 3005
	Elongation	≥ 230 %	JIS C 3005
The permission tension		≤ 89 N	-
Permission bend radius		More than 6 times of the cable O.D.	-

5. Environment Characteristics

Item	Standard Value	Test Method
Migration	No deformity, discoloration or other flaws must be found on ABS resin plates during visual inspection.	Test condition: Temperature:50+/-1°C Duration:24+/-1hour (humidity not designated) Load:500+/-25g
Flame Retardance	Flame must extinguish naturally within 60 seconds.	Perform inclination test according to JIS C 3005.

Note: Testing must be performed under standard conditions set down in "JIS C 60068-1 General Environmental Testing Rules (Electric/Electronics)."

Standard Conditions: Unless otherwise specified, all tests and measurements should be performed within a normal temperature range of 15-35°C, a relative humidity of 25-75%, and an atmospheric pressure of 86-106kPa.

Kabel-Ø	Kabelgruppe*	Kabeltyp	Kabelmantel/ Farbe	Sachnummer
8	104	L-5.5CUHWS	PVC schwarz	13-1219-1000

* siehe *Kabeltabelle Koaxialkabel*

Die angegebenen Daten dienen allein der Produktbeschreibung und sind nicht als zugesicherte Eigenschaften im Rechtssinne aufzufassen. Konstruktionsänderung, Liefermöglichkeiten und Irrtum vorbehalten.