


Expanding Mandrel

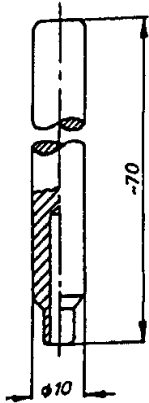

Usage for expanding the screening braid of Coaxial- and Triaxial Cables.

Diameter*	Part Number
0.8 – 0.9	90-1064-1201
1.0 – 1.1	90-1280-1201
1.2 – 1.3	90-1281-1201
1.4 – 1.5	90-1282-1201
1.5 – 1.6	90-1033-1201
1.6 – 1.7	90-1283-1201
1.8 – 1.9	90-1284-1201
2.0 – 2.1	90-1285-1201
2.1 – 2.2	90-1195-1201
2.2 – 2.3	90-1286-1201
2.4 – 2.5	90-1287-1201
2.5 – 2.6	90-1034-1201
2.6 – 2.7	90-1288-1201
2.8 – 2.9	90-1289-1201
3.0 – 3.1	90-1035-1201
3.2 – 3.3	90-1290-1201
3.4 – 3.5	90-1291-1201
3.6 – 3.7	90-1292-1201
3.7 – 3.8	90-1004-1201

Diameter*	Part Number
3.8 – 3.9	90-1293-1201
4.0 – 4.2	90-1294-1201
4.3 – 4.5	90-1295-1201
4.6 – 4.8	90-1296-1201
4.9 – 5.1	90-1036-1201
5.2 – 5.4	90-1297-1201
5.5 – 5.7	90-1298-1201
5.8 – 6.0	90-1299-1201
6.1 – 6.3	90-1300-1201
6.4 – 6.6	90-1005-1201
6.7 – 6.9	90-1301-1201
7.0 – 7.3	90-1302-1201
7.4 – 7.5	90-1037-1201
7.4 – 7.7	90-1303-1201
7.9 – 8.0	90-1196-1201
7.8 – 8.1	90-1304-1201
8.2 – 8.5	90-1305-1201

*Diameter refer to the diameter of the dielectric, including any additional shield by aluminum- or copper film.