


a = 13.0 mm for Cable-Ø 3 up to 7 mm  
 a = 14.5 mm for Cable-Ø 9 mm  
 a = 16.5 mm for Cable-Ø 11 mm

**Inner Conductor - Solder connection**  
**Outer Conductor - Clamp connection**

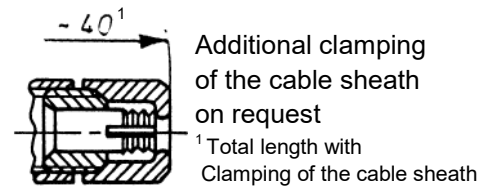

Other variations: See page „Design Options“

Cable-Ø	Cable Group*	Reference Cable 50 Ohm*	Part Number	Assembly Instruction
2	46	RG-178B; RG-196A	1-4103-2240	25
3	1	RG-174; RG-188A; RG-316	1-1043-2240	12
	2	RG-178A		
4	3	RG-122	1-1044-2240	1
	4	0.4/2.5/4.0**		
5	5	RG-55; RG-58; RG-141; RG-142; RG-303; Aircell 5; HF 195 PVC Siva	1-1045-2240	1
	64	RG-223	1-1405-2240	
	19	0.6/3.0/5.0**		
6	23	0.6/3.7/6.0**	1-1460-2240	1
	50	0.8/3.7/6.0**	1-1406-2240	
7	22	RG-304	1-1407-2240	2
	11	0.8/4.8/7.0**	1-1047-2240	
	51	1.0/4.8/7.0**		
8	12	0.8/4.8/8.0**	1-1048-2240	2
9	13	1.0/6.6/9.0**	1-1408-2240	
	52	1.4/6.4/9.0**		
11	27	RG-8A; RG-9B; RG-115A; RG-165; RG-213; RG-214; RG-225	1-2162-2240	2
	28	1.2/7.2/10.5**	1-2163-2240	
	29	0.8/7.2/10.5**	1-2164-2240	

\* see *Cable Table Coaxial Cable*

\*\* Cable dimensions (Inner conductor/Dielectric/Cable sheath); Other dimensions: see *Cable Group-Finder*

The specified data serve only to describe the product and should not be considered legally binding, guaranteed properties. We reserve the right to make constructional changes, determine delivery and are not responsible for any errors and omissions.